


External roller shutter IDEAL

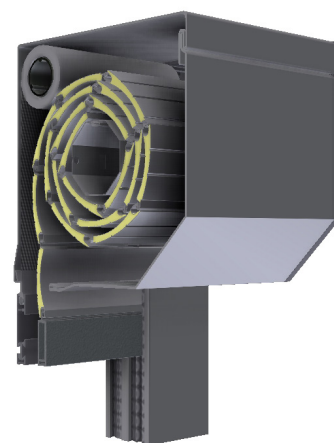

- **HEAT PROTECTION**
- **ANTI-THEFT PROTECTION**
- **LIGHT REGULATION**
- **DIMMING**
- **UV PROTECTION**
- **HEATING / COOLING SAVINGS**

External roller shutter IDEAL with ALU cabinet, closed on all sides. The shaft is galvanized and mounted on aluminium end cap with ball bearings. Guiderrails are aesthetically finished with plastic ends and fixed brushes for quieter operation. Weighted end slats made from aluminium. Roll-up mosquito net including the brake for easier lifting.

SLATS | Color palette:

WARNING: Certain colours on the chart may vary from original!


	PC1	01 WHITE	02 D. CHOCO	03 SILVER	05 L. CHOCO	04 BEIGE	08 GREEN	10 L. GREY	11 ANTRACITO GRISO	13 GRAPHITE	06 ASH	07 WALNUT	16 GOLDEN OAK
		12 ANTHRACITE	14 RAL 9007	52 DB 703	15 OCHRE	18 RAL 8017					17 WALNUT GEA	21 RAL 3011	

	PC1	01 WHITE	02 D. CHOCO	03 SILVER	04 BEIGE		PC1	01 WHITE	03 SILVER
		11 ANTRACITO GRISO	12 ANTHRACITE	14 GREY	52 DB 703			12 ANTHRACITE	52 DB 703

* colors 02, 04, 11, 14 available for orders over 50m²

ALU slats are filled with insulation - polyurethane foam, standard fitted with anti-theft springs. Machine slat binding ensures a quieter and more reliable operation.

CABINET, GUIDERAILS, END SLAT | Color palette:

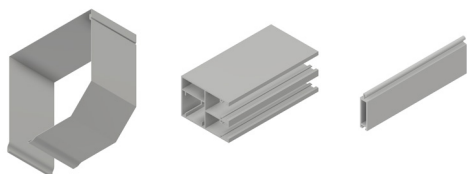

PC1	013 WHITE	010 RAL 9006	090 RAL 9007	
	042 RAL 7015	066 RAL 8012	052 DB 703	

WARNING: Certain colours on the chart may vary from original!

MANIPULATION:




Manipulation is possible with automaton or electrical motor. For motor operation there is the standard PLUG & PLAY function, which allows the connection of several motors to a single switch, self-adjusting positions and the safety function in the event of an obstacle.




External roller shutter IDEAL



TEHNICAL DRAWINGS | Shade details:

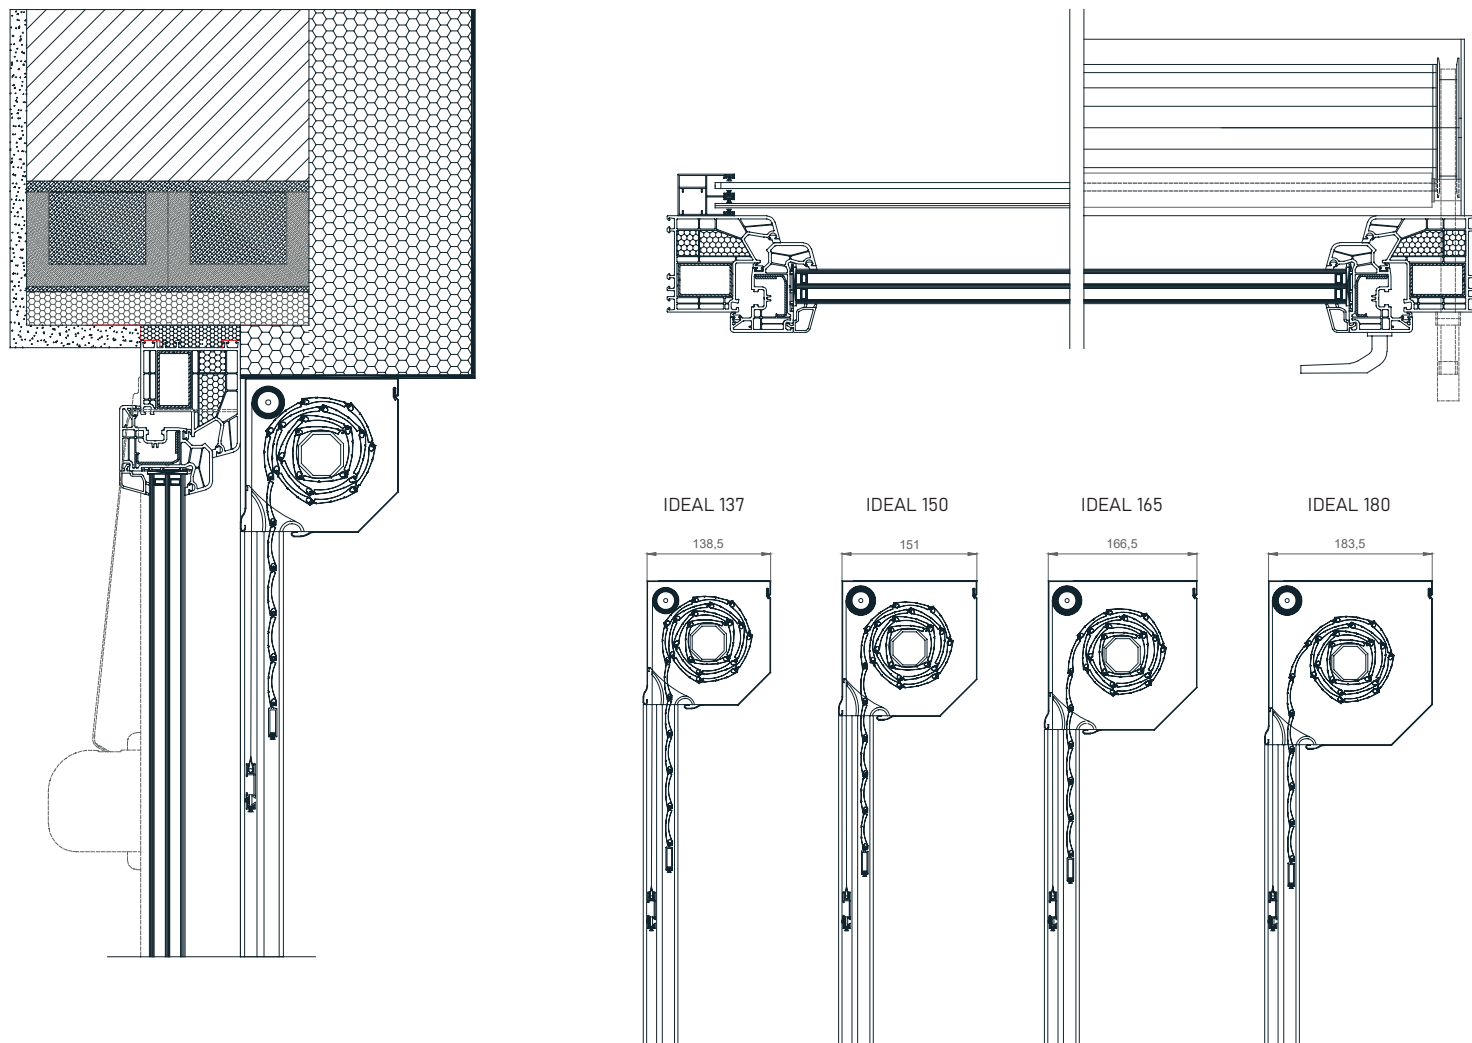

GUIDERAILS

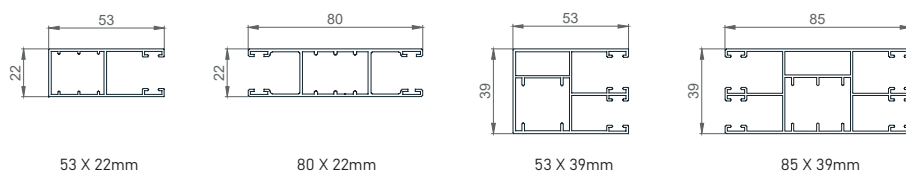

SLATS

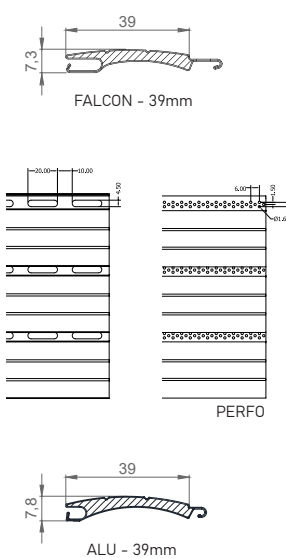


TABLE OF BOX (CABINET) SIZES

Slat/Shaft cabinet size	FALCON / 60mm		ALU / 40mm		ALU / 60mm	
		MOS.		MOS.		MOS.
13,7 cm	110,0	-	173,9	-	146,3	-
15,0 cm	134,0	104,0	204,9	150,8	189,9	130,9
16,5 cm	184,0	141,0	265,0	202,3	249,9	189,9
18,0 cm	249,0	210,0	319,9	255*	309,9	255*
20,5 cm	326,0	270,0	407,1	-	376,2	-