


INSTRUCTIONS FOR MEASUREMENT

KRPAN - visible mask - standard versions

VISIBLE GUIDE RAILS

- VENETIAN BLIND WIDTH = REVEAL WIDTH - 1 cm

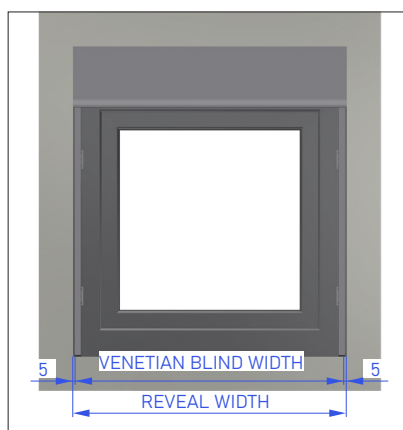


- Check the measurement twice at different heights, both inside and outside the reveal!

i Installation of visible guide rails after completion of the facade.

KRPAN - concealed mask - standard versions

VISIBLE GUIDE RAILS

- VENETIAN BLIND WIDTH = REVEAL WIDTH - 1 cm

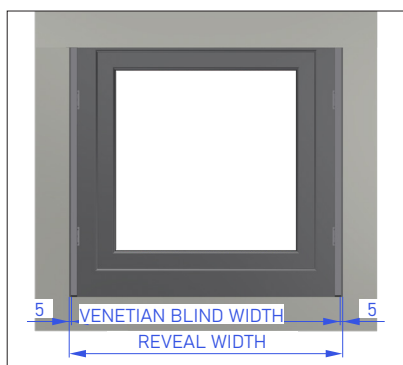


- Check the measurement twice at different heights, both inside and outside the reveal!

i Installation of visible guide rails after completion of the facade.

CONCEALED GUIDE RAILS

- VENETIAN BLIND WIDTH = WINDOW WIDTH - 3 cm

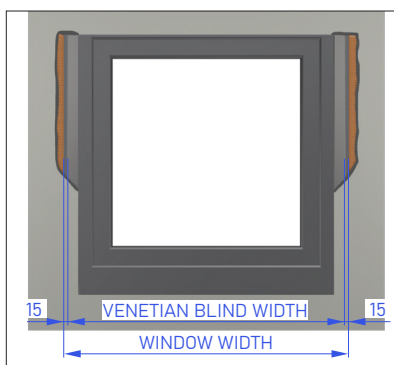

- For EM drive, a 15 mm lateral clearance between the guide rails and the window frame is required; for manual drive, 10 mm is required.
- Facade overlap onto the window frame = 1 cm on each side

i Installation of concealed guide rails before applying the facade.