

External CONCEALED roller shutter 20°




- **HEAT PROTECTION**
- **ANTI-THEFT PROTECTION**
- **LIGHT REGULATION**
- **DIMMING**
- **UV PROTECTION**
- **HEATING / COOLING SAVINGS**

Concealed mount-on roller shutters 20° differ from the 90° shutters in the shape of the lower service panel, which is curved at a 20° angle. The angle gives the shutter a better shape and strengthens the bottom panel.



The curvature of the panel can be partly seen from the side, which can in combination with shutter and exterior wall colour contribute to a unique appearance.

SLATS | Color palette:

WARNING: Certain colours on the chart may vary from original!

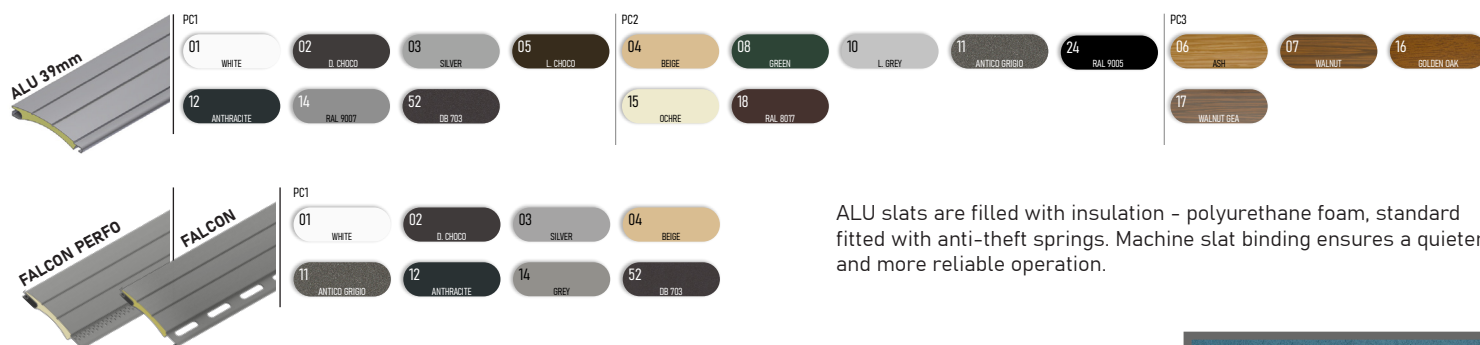

CABINET, GUIDERAILS, END SLAT | Color palette:

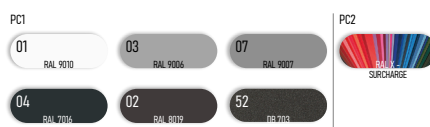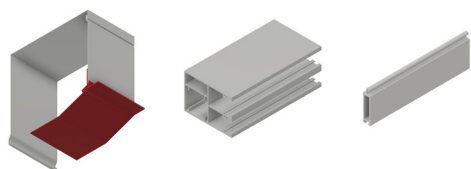

WARNING: Certain colours on the chart may vary from original!

MANIPULATION:





Roller shutters can be operated manually, while a motor drive provides greater comfort and ease of use. They can be controlled using switches or remote controls, also without any modifications to the walls, while control units enable automated and remote operation via a smartphone.




External CONCEALED roller shutter 20°




TEHNICAL DRAWINGS | Shade details:

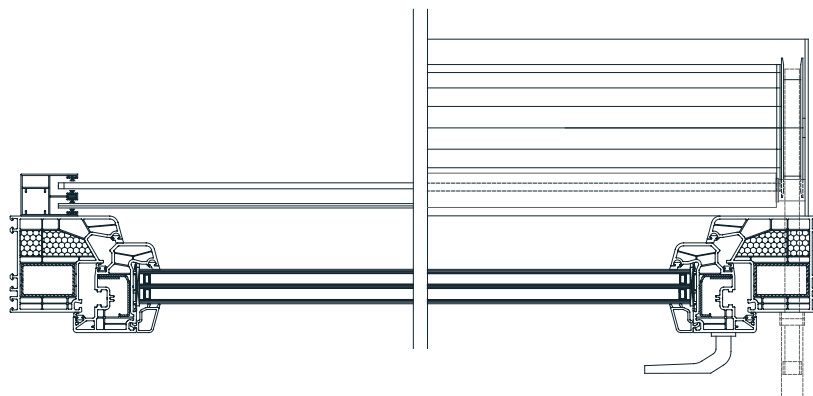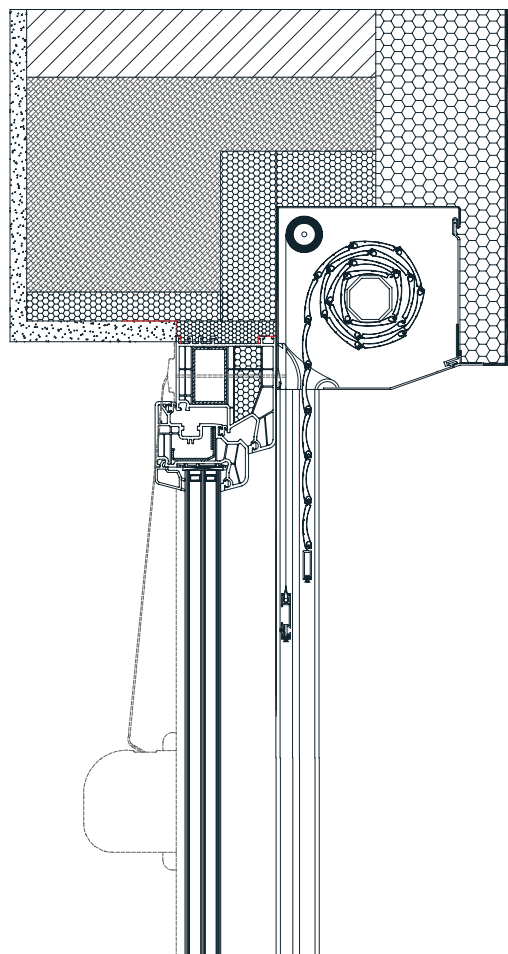


CONCEALED 20°
137

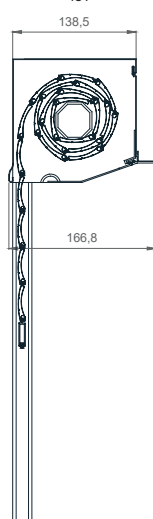


CONCEALED 20°
150

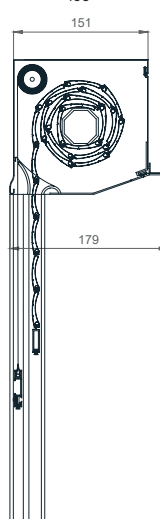


CONCEALED 20°
165

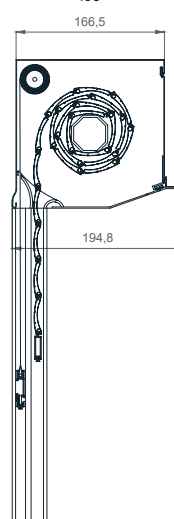


CONCEALED 20°
180

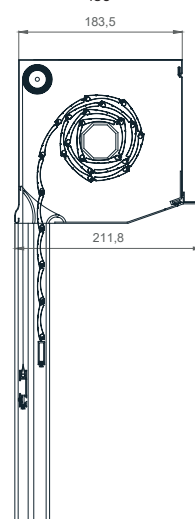


GUIDERAILS




53 X 22mm



80 X 22mm




53 X 39mm




85 X 39mm


SLATS



FALCON - 39mm



PERFO



ALU - 39mm

TABLE OF BOX (CABINET) SIZES

Slat/Shaft cabinet size	FALCON / 60mm		ALU / 40mm		ALU / 60mm	
	-	MOS.	-	MOS.	-	MOS.
13,7 cm	-	-	173,9	-	146,3	-
15,0 cm	134,0	104,0	204,9	150,8	189,9	130,9
16,5 cm	184,0	141,0	265,0	202,3	249,9	189,9
18,0 cm	249,0	210,0	319,9	255*	309,9	255*
20,0 cm	-	-	-	-	-	-